

# Thermostats TRS 60 + TRO 60

**NEW!**

- Bi-metallic switch for monitoring and regulating the temperature inside enclosures and housings
- Protection for electronic devices against high & low temperatures
- Application as signal contact
- Snap on fastening on 35 mm rails to DIN EN 50022
- VDE- and UL-approval are applied

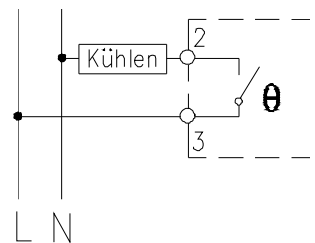
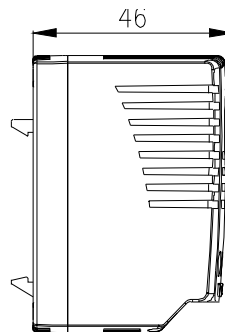
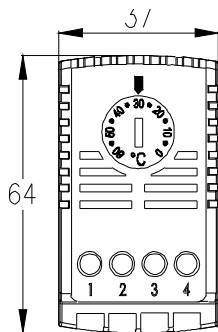
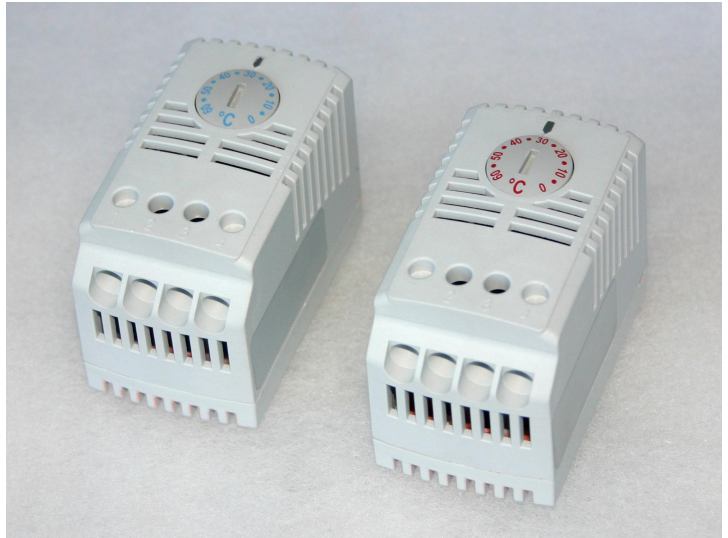


Diagram TRS 60

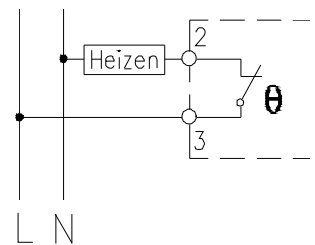


Diagram TRO 60

Technical Data	TRS 60	TRO 60
Contact	NO	NC
Adjusting range	0 – 60°C	
Switching current	10 (2) A	
Hysteresis	4 – 7K	
Switching system	Bi-metallic strip	
Connection	Terminals 2,5 mm <sup>2</sup>	
Weight	50 g	

